


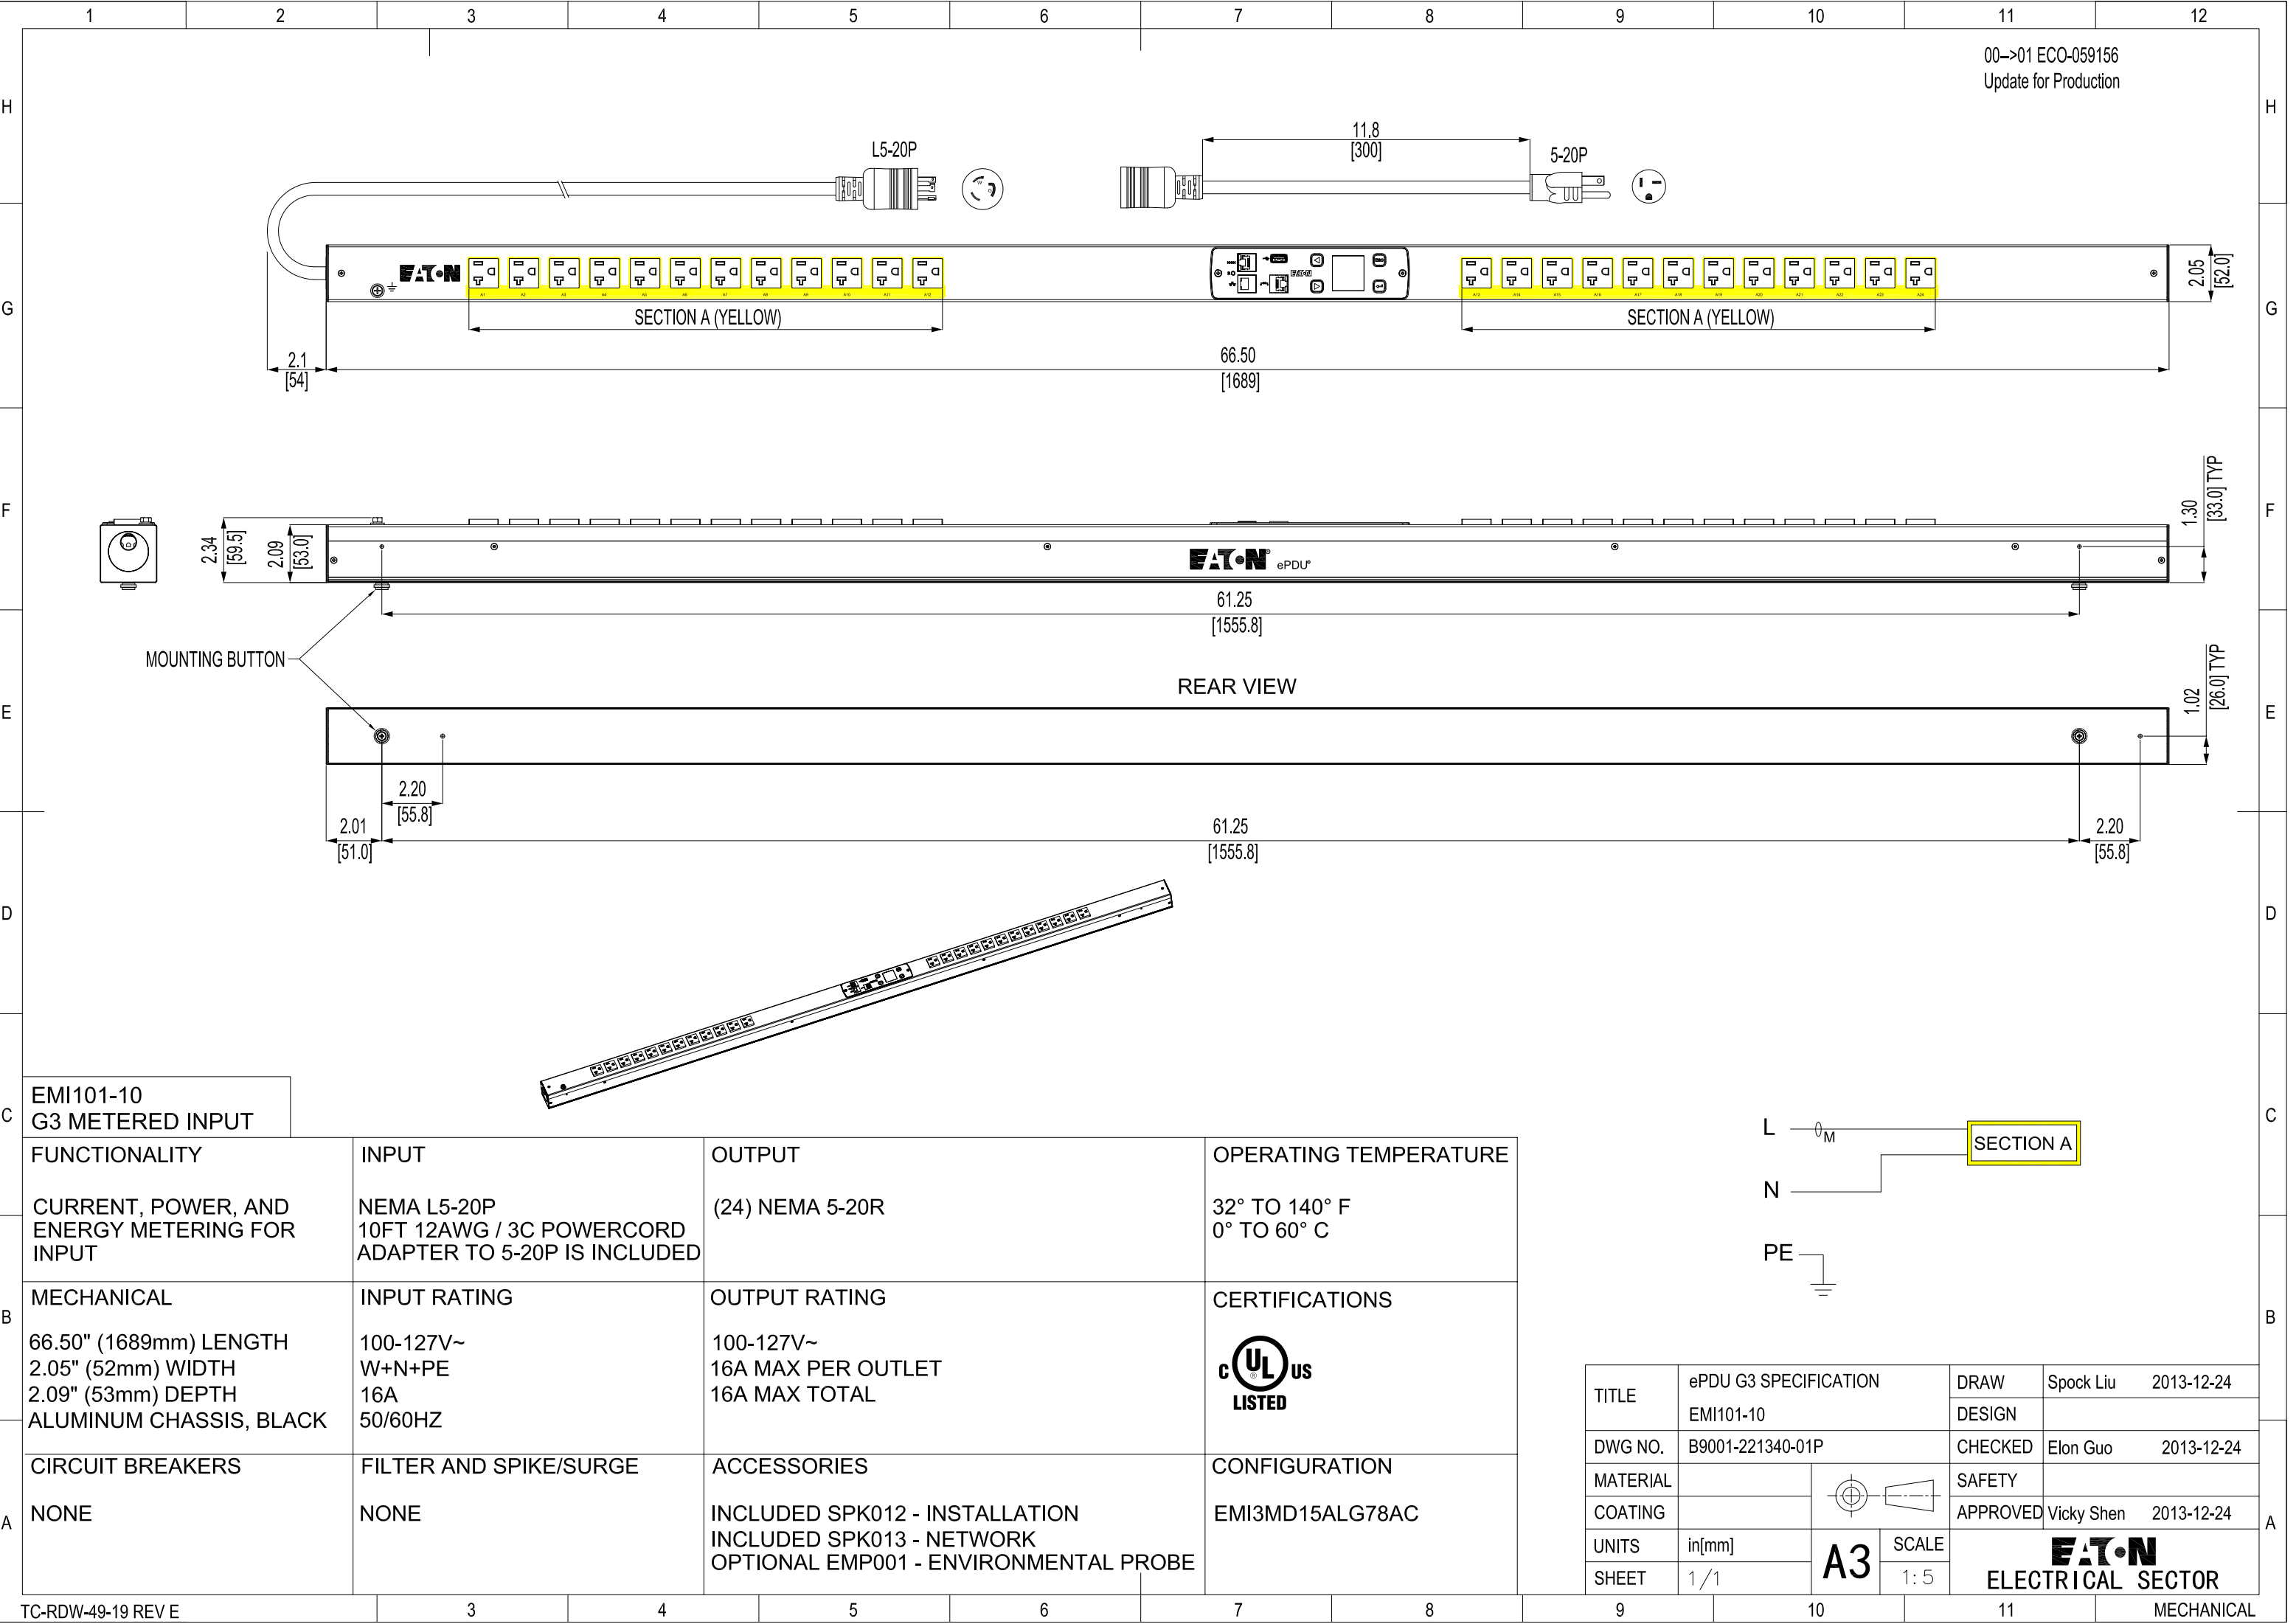

00-->01 ECO-059156
Update for Production

L5-20P

5-20P

SECTION A (YELLOW)


SECTION A (YELLOW)

EATON ePDU®


REAR VIEW

EMI101-10
G3 METERED INPUT

FUNCTIONALITY	INPUT	OUTPUT	OPERATING TEMPERATURE
CURRENT, POWER, AND ENERGY METERING FOR INPUT	NEMA L5-20P 10FT 12AWG / 3C POWERCORD ADAPTER TO 5-20P IS INCLUDED	(24) NEMA 5-20R	32° TO 140° F 0° TO 60° C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
66.50" (1689mm) LENGTH 2.05" (52mm) WIDTH 2.09" (53mm) DEPTH ALUMINUM CHASSIS, BLACK	100-127V~ W+N+PE 16A 50/60HZ	100-127V~ 16A MAX PER OUTLET 16A MAX TOTAL	
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
NONE	NONE	INCLUDED SPK012 - INSTALLATION INCLUDED SPK013 - NETWORK OPTIONAL EMP001 - ENVIRONMENTAL PROBE	EMI3MD15ALG78AC

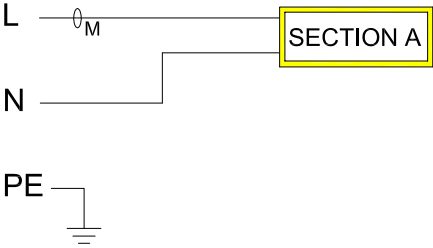

TITLE	ePDU G3 SPECIFICATION EMI101-10	DRAW	Spock Liu	2013-12-24
DWG NO.	B9001-221340-01P	DESIGN		
MATERIAL		CHECKED	Elon Guo	2013-12-24
COATING		SAFETY		
UNITS	in[mm]	APPROVED	Vicky Shen	2013-12-24
SHEET	1 / 1			



A3

SCALE
1:5



ELECTRICAL SECTOR