

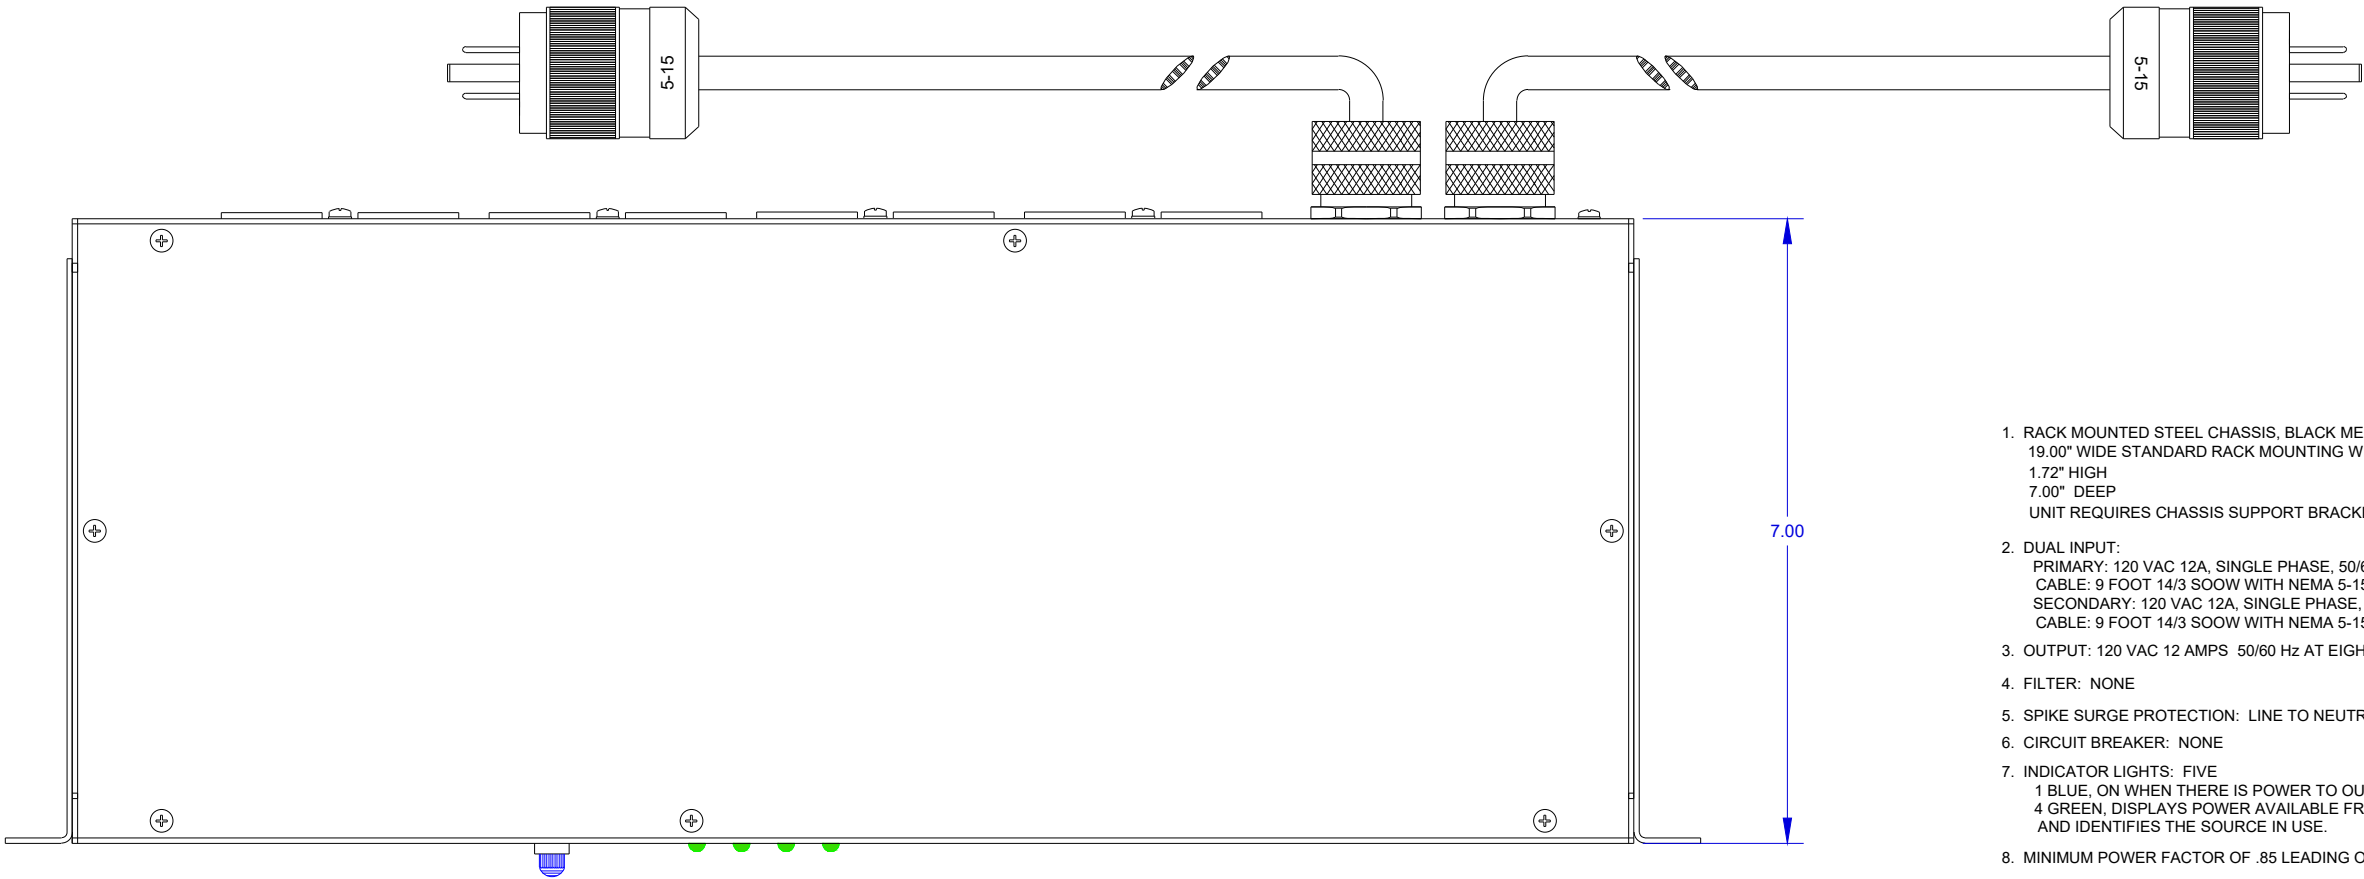


REV	ECO No.	REVISION	DR	CK	DATE
A	NONE	ENGINEERING RELEASE	LW	J.O.	02/09/04
B	8548	UPDATE CHASSIS & TEXT	LS	DK	20 FEB 08
C	11694	UPDATE EATON LOGOS	GS		16 MAR 10
002	064766	ADD ROHS NOTES	HN		02 MAY 14
03	183447	DELETE TUV LABELS	J.O.		13 APR 20

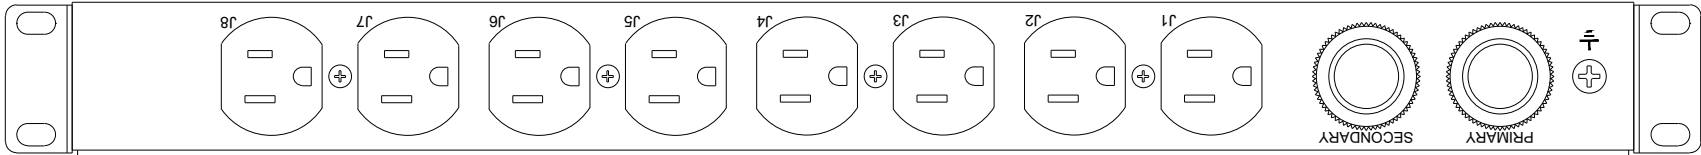

- RACK MOUNTED STEEL CHASSIS, BLACK MEDIUM TEXTURE
19.00" WIDE STANDARD RACK MOUNTING WITH ADJUSTABLE BRACKETS
1.72" HIGH
7.00" DEEP
UNIT REQUIRES CHASSIS SUPPORT BRACKETS
- DUAL INPUT:
PRIMARY: 120 VAC 12A, SINGLE PHASE, 50/60HZ
CABLE: 9 FOOT 14/3 SOOW WITH NEMA 5-15 PLUG
SECONDARY: 120 VAC 12A, SINGLE PHASE, 50/60HZ
CABLE: 9 FOOT 14/3 SOOW WITH NEMA 5-15 PLUG
- OUTPUT: 120 VAC 12 AMPS 50/60 Hz AT EIGHT NEMA 5-15 RECEPTACLES
- FILTER: NONE
- SPIKE SURGE PROTECTION: LINE TO NEUTRAL
- CIRCUIT BREAKER: NONE
- INDICATOR LIGHTS: FIVE
1 BLUE, ON WHEN THERE IS POWER TO OUTLETS
4 GREEN, DISPLAYS POWER AVAILABLE FROM DUAL SOURCE,
AND IDENTIFIES THE SOURCE IN USE.
- MINIMUM POWER FACTOR OF .85 LEADING OR LAGGING
- AUTOSWITCH BETWEEN PRIMARY AND SECONDARY POWER SOURCE

INPUT VOLTAGE	DROP-OUT	PULL-IN
120 VAC	90	103
- UL/CUL LISTED PRODUCT.
- RoHS COMPLIANT PER DIRECTIVE 2011/65/EU WITH APPLICABLE EXEMPTIONS

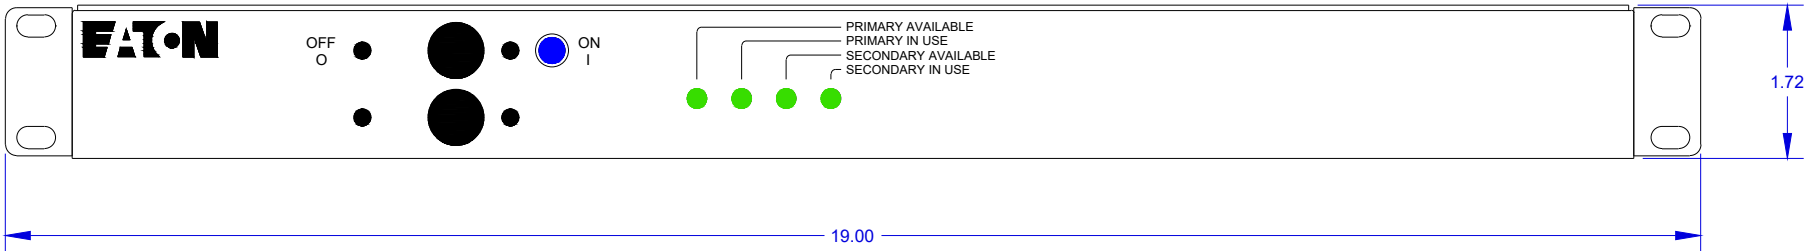

ALL MATERIALS AND SUB-MATERIALS MUST COMPLY WITH EATON SPECIFICATION 164080496. DOCUMENTATION CERTIFYING COMPLIANCE TO EATON SPECIFICATION 164080496 MUST BE SUBMITTED AND MAINTAINED UPON REQUEST.

THIS DOCUMENT, INCLUDING THE DRAWING AND INFORMATION CONTAINED THEREON, IS CONFIDENTIAL AND IS THE EXCLUSIVE PROPERTY OF EATON CORPORATION, AND IS MERELY ON LOAN AND SUBJECT TO RECALL BY EATON CORPORATION AT ANY TIME BY TAKING POSSESSION OF THIS DOCUMENT. THE RECIPIENT ACKNOWLEDGES AND AGREES THAT THIS DOCUMENT CANNOT BE USED IN ANY MANNER ADVERSE TO THE INTERESTS OF EATON AND THAT NO PORTION OF THIS DOCUMENT MAY BE COPIED OR OTHERWISE REPRODUCED WITHOUT THE PRIOR WRITTEN CONSENT OF EATON. IN THE CASE OF CONFLICTING CONTRACTUAL PROVISIONS THIS NOTICE SHALL GOVERN THE STATUS OF THIS DOCUMENT.

EATON		15375 Barranca Pkwy, Ste C104, Irvine, California 92618 Phone (949) 452-9500 www.ePDU.com	
DIMENSIONS IN INCHES TOLERANCES DECIMALS .XX ANGLES ± 0.5° UNLESS OTHERWISE SPECIFIED CAGE CODE 31795		TITLE SPECIFICATION DRAWING T2235-A1-NNB09S DRAWN BY: J. OSBORNE DWG FILENAME: T2235-A1-NNB09S_ME.dwg SCALE: 1:1 SIZE: D SHEET: 1 OF 1 DWG NO.: T2235-A1-NNB09S_ME REV: 03	